

Aluminum Portable Soccer Goals

Soccer Goals
and Accessories

by **DRAPER**

Please Mark Appropriate Selections

Select Soccer Goal



- 505001—Youth 12' x 6'6" Portable
- 505002—Club 21' x 7' Portable
- 505003—Official 24' x 8' Portable

Select Soccer Net

- 505012—12' x 6'6" x 2' x 6'
- 505014—21' x 7' x 3' x 8'
- 505015—24' x 8' x 4' x 10'

Select Options

- 505010—Soccer Goal Anchor Kit (set of four standardly supplied with each pair of aluminum portable goals)

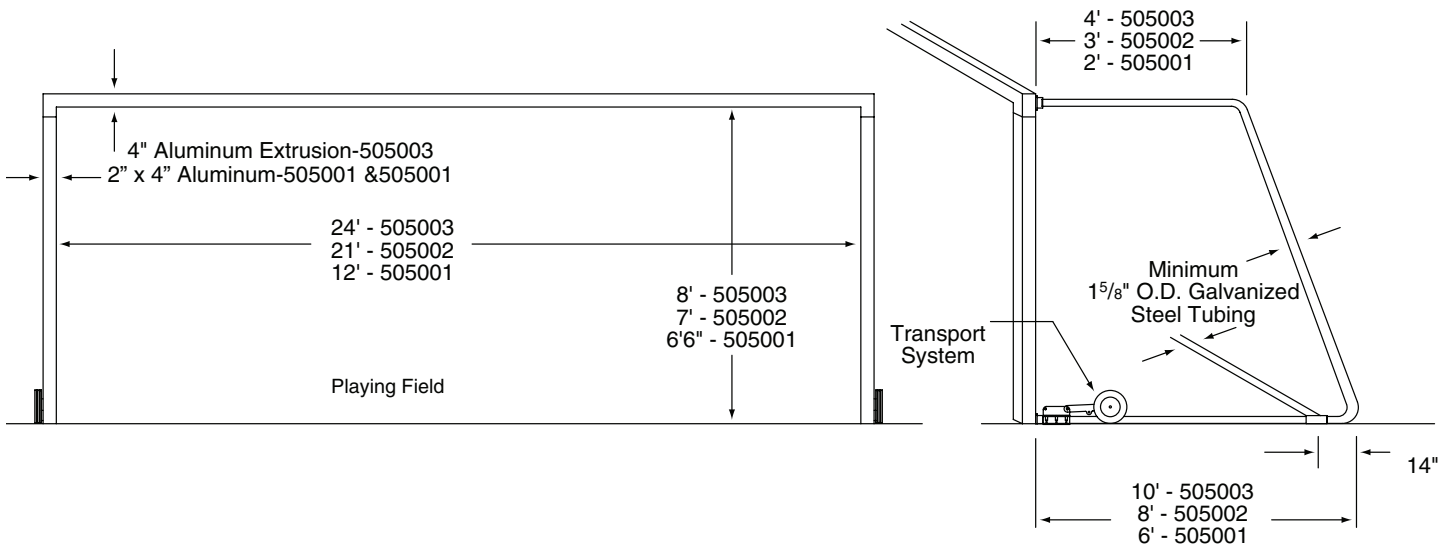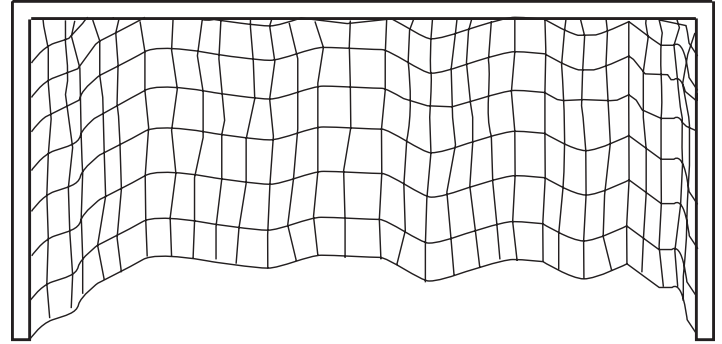

Warning:
All portable soccer goals must be anchored at all times



411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999
www.draperinc.com ■ fax 765-987-7142
Copyright © 2009 Draper Inc. Form AluminumPortableSoccerGoals_Sub09 Printed in U.S.A.

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____

Aluminum Portable Soccer Goals

Specifications—Youth 12' x 6.5' Aluminum Portable Goals

Aluminum Portable Soccer Goals shall be provided by Draper, Inc., of Spiceland, IN.

505001 Youth Size—Face of goal shall be constructed of 4" x 2" extruded aluminum with corner radii for safety and a minimum wall thickness of .080". Goal shall include net attachment using specially designed clips included with each system. Goal shall have a 12' wide x 6'6" high opening.

Crossbar shall attach to uprights by method so hardware does not protrude from the front face of the goal.

Backstays shall be constructed of 1⁵/₈" diameter zinc coated steel tube and provide a 2' top depth x 6' bottom depth. A 1⁵/₈" diameter zinc coated steel stabilizer tube shall connect to the rear of the backstays to provide stability during use and transport.

A standard 10" diameter x 2" wide transport wheel shall attach to each side of the goal to facilitate transport. 4" x 2" face of the goal shall have a white polyester powder coated finish.

Goal shall carry a one-year warranty.

Standard features shall include transport wheels, auger type rear safety hold-downs, net, net attachment clips and rear stabilizer bars.

System shall weigh approximately 291 lbs. per pair.

Specifications—Club 21' x 7' Aluminum Portable Goals

Aluminum Portable Soccer Goals shall be provided by Draper, Inc., of Spiceland, IN.

505002 Club Size—Face of goal shall be constructed of 4" x 2" extruded aluminum with corner radii for safety and a minimum wall thickness of .080". Goal shall include net attachment using specially designed clips included with each system. Goal shall have a 21' wide x 7' high opening.

Crossbar shall attach to uprights by method so hardware does not protrude from the front face of the goal.

Backstays shall be constructed of 1⁵/₈" diameter zinc coated steel tube and provide a 3' top depth x 8' bottom depth. A 1⁵/₈" diameter zinc coated steel stabilizer tube shall connect to the rear of the backstays to provide stability during use and transport.

A standard 10" diameter x 2" wide transport wheel shall attach to each side of the goal to facilitate transport. 4" x 2" face of the goal shall have a white polyester powder coated finish.

Goal shall carry a one-year warranty.

Standard features shall include folding transport wheels, auger type rear safety hold-downs, net, molded net attachment clips and rear stabilizer bars.

System shall weigh approximately 383 lbs. per pair.

Specifications—Official 24' x 8' Aluminum Portable Goals

Aluminum Portable Soccer Goals shall be provided by Draper, Inc., of Spiceland, IN.

505003 Official Size—Face of goal shall be constructed of 4" square extruded aluminum with corner radii for safety and a minimum wall thickness of .100". Extrusion shall have a track extruded in the rear face to allow net attachment using specially design clips included with each system. Goal shall have a 24' wide x 8' high opening.

Crossbar shall attach to uprights by method so hardware does not protrude from the front face of the goal.

Backstays shall be constructed of 2" diameter zinc coated steel tube and provide a 4' top depth x 10' bottom depth. A 2" diameter zinc coated steel stabilizer tube shall connect to the rear of the backstays to provide stability during use and transport.

A standard 10" diameter x 2" wide transport wheel shall attach to each side of the goal to facilitate transport. 4" square face of the goal shall have a white polyester powder coated finish.

Goal shall meet all NCAA, NF and FIFA rules and carry a one-year warranty.

Standard features shall include folding transport wheels, auger type rear safety hold-downs, net, molded net attachment clips and rear stabilizer bars.

System shall weigh approximately 493 lbs. per pair.

Specifications—Twisted Nylon Soccer Nets

Net shall be constructed of 3.5 mm minimum white super high-strength twisted nylon cord mesh with a minimum of 5.5" square openings.

Net shall have finished rope edges.

505012—Net shall have a 12' width, a 6'6" height, a 6' bottom depth and a 2' top depth. Shipping weight shall be approximately 10 lbs./pair.

505014—Net shall have a 21' width, a 7' height, a 8' bottom depth and a 3' top depth. Shipping weight shall be approximately 13 lbs./pair.

505015—Net shall have a 24' width, an 8' height, a 10' bottom depth and a 4' top depth. Shipping weight shall be approximately 20 lbs./pair.

**Downloadable 3-part specifications
are available at www.draperinc.com.**