

Overview

Simple to configure, the RFR provides control for up to 32 separate shade groups. Touch control allows shades to be positioned anywhere with one touch.

Features


- Simple configuration using the built-in touch controls and lcd display
- Touch control to position the shades anywhere with one touch
- Controls up to 32 channels.



Technical Specifications - Handheld RF Remote

Input Power:	AAA Batteries (2)
Material:	ABS plastic
Operating Temp:	Ambient
Dimensions:	5 7/8" x 1 9/16" x 7/8" 150 x 40 x 22mm
Range:	100ft 30.5M
Communication:	Bluetooth 2.4GHz
Shipping Weight:	2lb. 0.9 kg
Indoor Use Only	
Requires WNG (C156.268)	

IntelliFlex I/O the complete control solution for Motorized FlexShades®

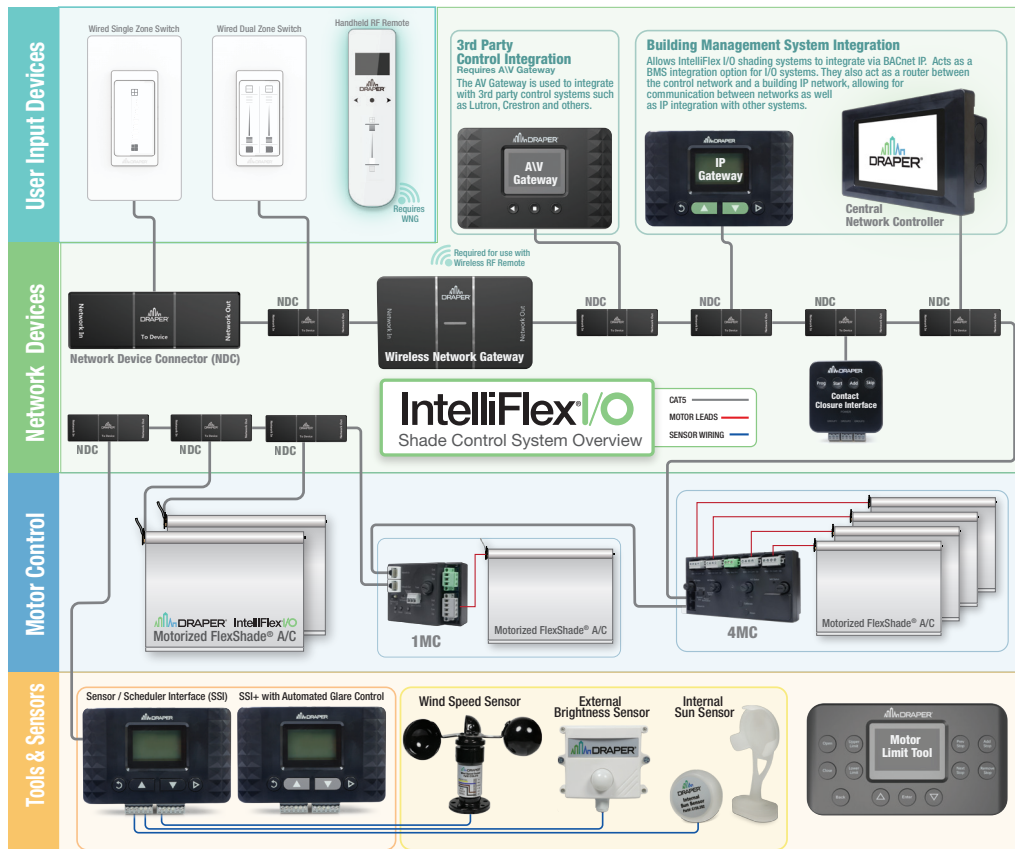

IntelliFlex I/O Compatible Components

	Part Number
User Input Devices	
Single Zone Wired Wall Switch (S1)	C112.161
Dual Zone Wired Wall Switch (S2)	C112.162
Handheld RF Remote (RFR)	C156.270
IR Transmitter and Receiver (IRT/R)	121227
IR Transmitter (IRT)	121228
Network Devices	
Network Device Connector (NDC)	C156.267
Wireless Network Gateway (WNG)	C156.268
AV Gateway (AVG)	C156.269
Sensor/Scheduler Interface (SSI)	C156.272
SSI w/ Automated glare control (SSI+)	C156.304
Contact Closure Interface (CCI)	C156.273
Central Network Controller (CNC)	C156.271
IP Gateway (IPG)	C156.305
3-Port Network Device Connector (NDC3)	C156.311
Motor Control	
1 Motor Controller w/enclosure (1MC)	C156.285SA
1 Motor Controller (1MC)	C156.285
4 Motor Controller w/enclosure (4MC)	C156.286SA
Tools	
Motor Limit Tool (MLT)	C202.047
IntelliFlex I/O Installation Kit (IO-Kit)	C504.206SA

For info on other I/O compatible products, visit draperinc.com.

For low voltage wiring requirements, Draper recommends consulting with a professional low voltage electrical contractor. **All low voltage wiring must be run separately from line voltage wiring.**